

PVC Coated Form Fittings - C Form 8

Calbond offers the full line of Form 8 and Form 7 PVC coated conduit bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.


Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are 1/2" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws



Standards:

- UL Listed Standard 514B
- CSA Standard: C22.2 No. 18

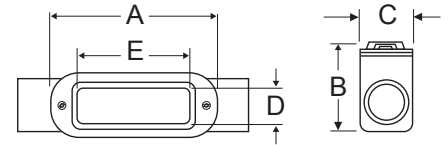

UL Listings and Compliances:

- Ferrous electrical conduit / File # DYIX.E226472
- Ferrous electrical conduit with PVC coating / File # DYJC.E226472

C Form 8									
Item Number	Trade Size	Size Metric (mm)	A	B	C	D	E	Weight Per 100 (lbs)	Aluminum Item Number
PV0500C18	1/2"	16	6.69	1.48	1.46	1.00	3.31	200	PA0500C19
PV0700C28	3/4"	21	7.78	1.73	1.27	1.19	3.94	230	PA0700C29
PV1000C38	1"	27	9.31	1.98	1.83	1.38	4.56	280	PA1000C39
PV1200C448	1-1/4"	35	11.00	2.42	2.27	1.75	5.31	450	PA1200C49
PV1500C58	1-1/2"	41	13.38	2.82	2.83	2.13	6.50	650	PA1500C59
PV2000C68	2"	53	14.25	3.60	3.83	3.00	8.56	1030	PA2000C69
PV2500C78	2-1/2"	63	17.63	4.48	5.08	14.25	10.88	1800	PA2500C789
PV3000C88	3"	78	17.63	4.85	5.08	4.25	10.88	2050	PA3000C889
PV3500C989	3-1/2"	91	20.75	5.73	6.33	5.44	13.44	1000	PA3500C989
PV4000C1089	4"	103	20.75	5.73	6.33	5.44	13.44	1200	PA4000C1089